



# **Android /IOS Smart Phone Installation Manual**


Install IP Camera



Install Mobile Phone App  
Technaxx Security



Register an Account




Add Cameras under this account

## IP Network Camera Installation Procedure :

1. Plug power cable to IP camera
2. Connect the LAN cable with camera and router.


Attention : DHCP service must be enabled in the Router ◦

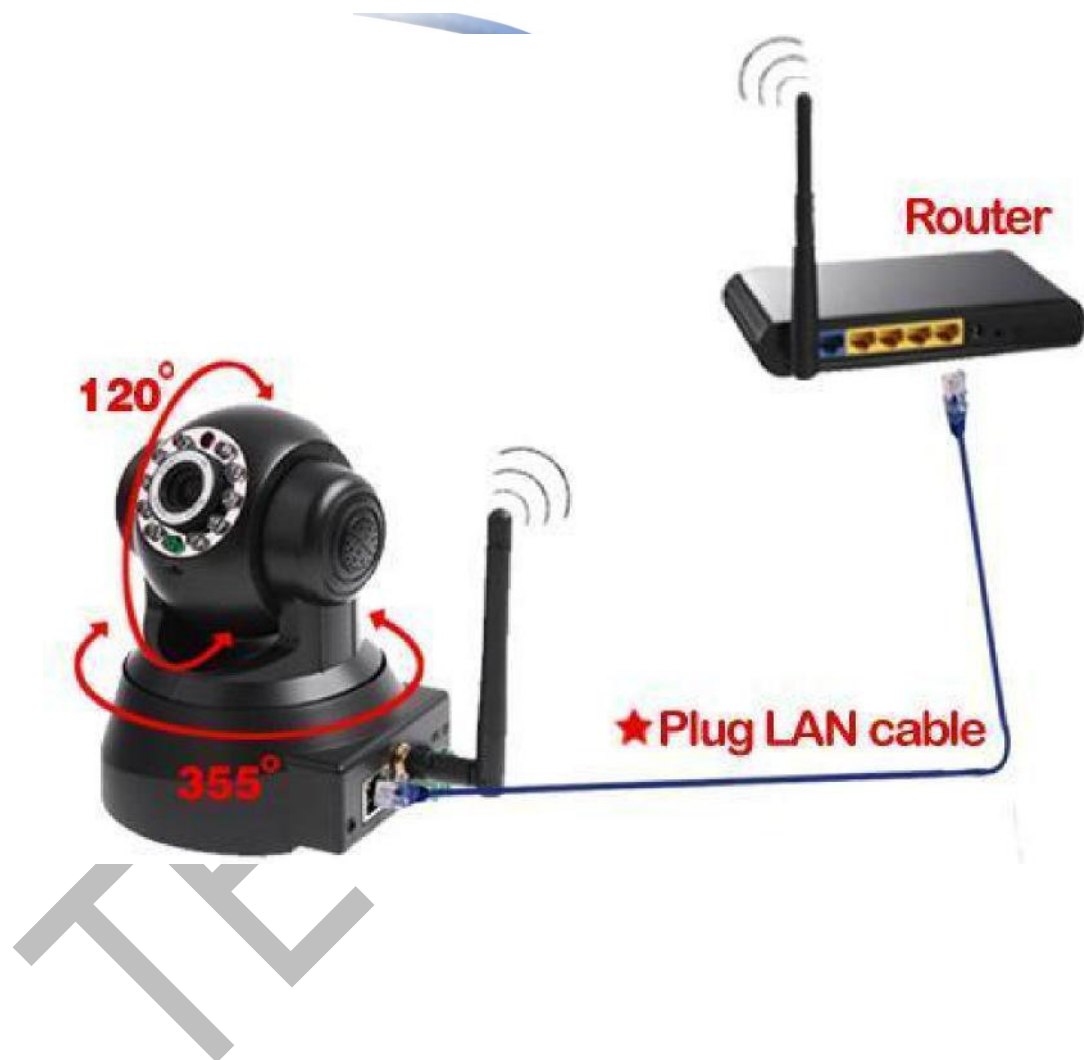

3. Before installation, make sure your phone is using 3G or WIFI
4. Install software: Search and Install “My Secure” in Apple APP store and Google play store



5. Click the APP icon to run the mobile APP

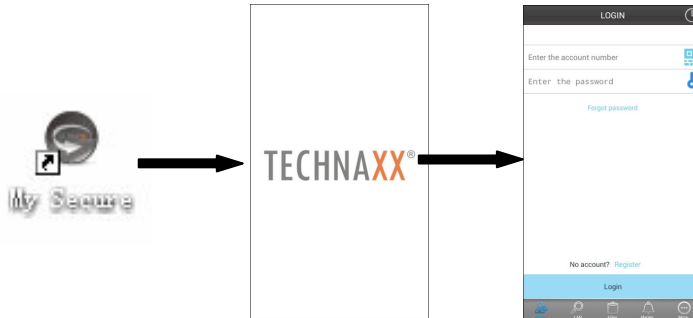


6. Input camera ID and password to Login camera


This block shows a detailed view of the app's login screen. On the left, there is a 'Plug2View' camera label with a QR code and the following information: 'Cam ID/User: E318458', 'login password: 61112', and 'Access code: 2231'. Two callout boxes provide instructions: one points to the QR code and says 'Check the camera label and input ID and password on the APP', and another points to the QR code icon on the app screen and says 'Also support click this icon to scan QR-code to auto input ID and password'. The app screen shows the 'LOGIN' header, input fields, and a blue 'Login' button. The bottom navigation bar is visible with icons for Home, Search, Files, Alarms, and More.

7. **Login account.** (If no accounts yet, go to register an account first and type User name and Password). Under this account you can add Security CAM's (go to point 11)

8. After successful login, click on a camera to start monitoring.

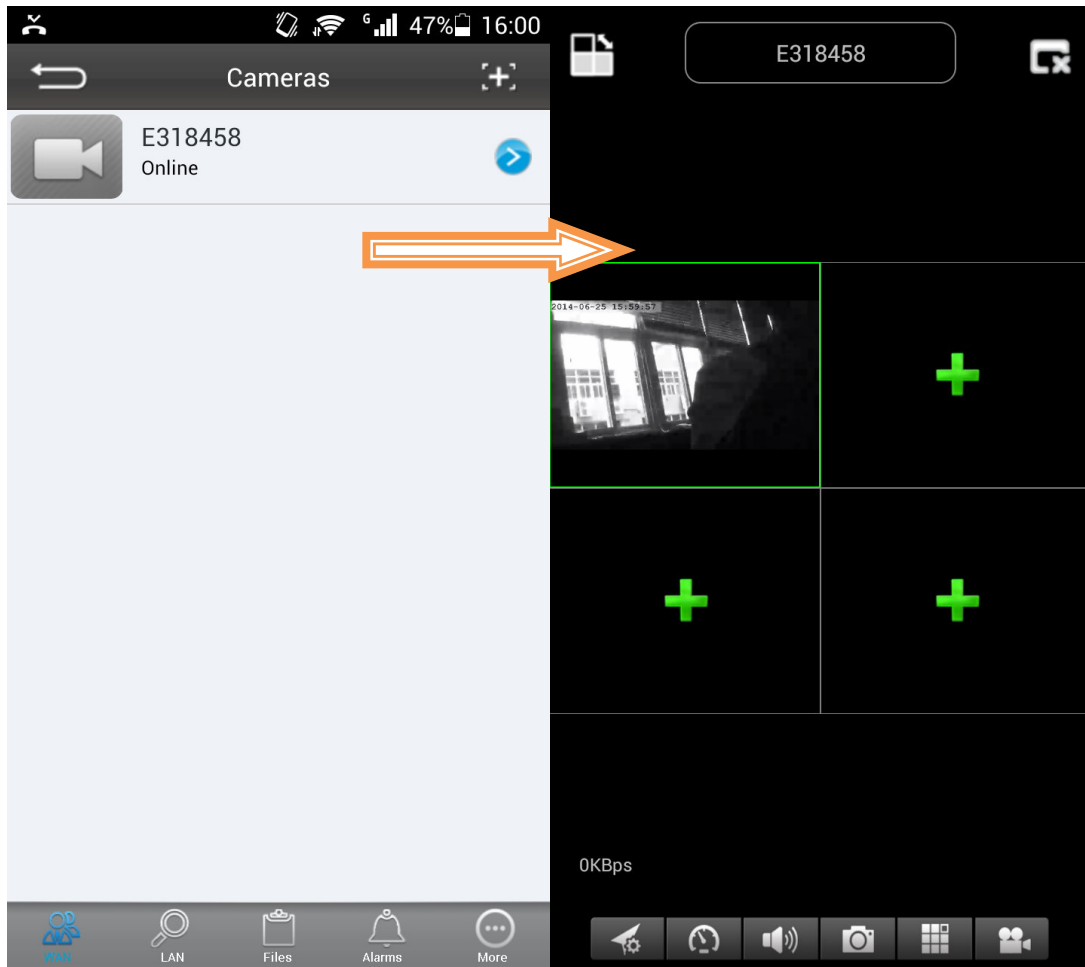

- Press at the “+” symbol to add a camera

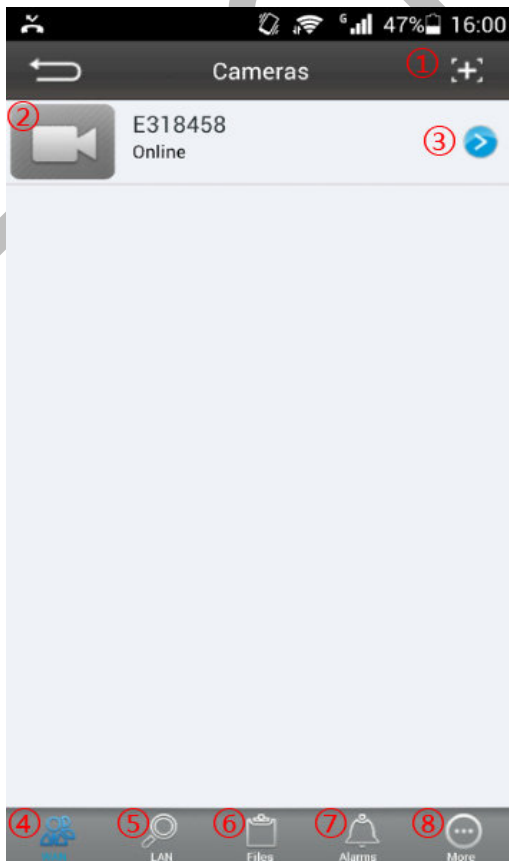



- 1.Add other camera
- 2.Play camera video
- 3.Config camera
- 4.Camera list in WAN
- 5.Camera list in LAN
- 6.Video playback
- 7.Alarm events
- 8.Software information





1. Select video resolution
2. preset operation
3. Audio talk
4. Snap Picture
5. Single screen and quad
6. Video record

### 9. Setting Camera under sub menu WAN



- Set video quality parameters and SD card, by clicking the sign

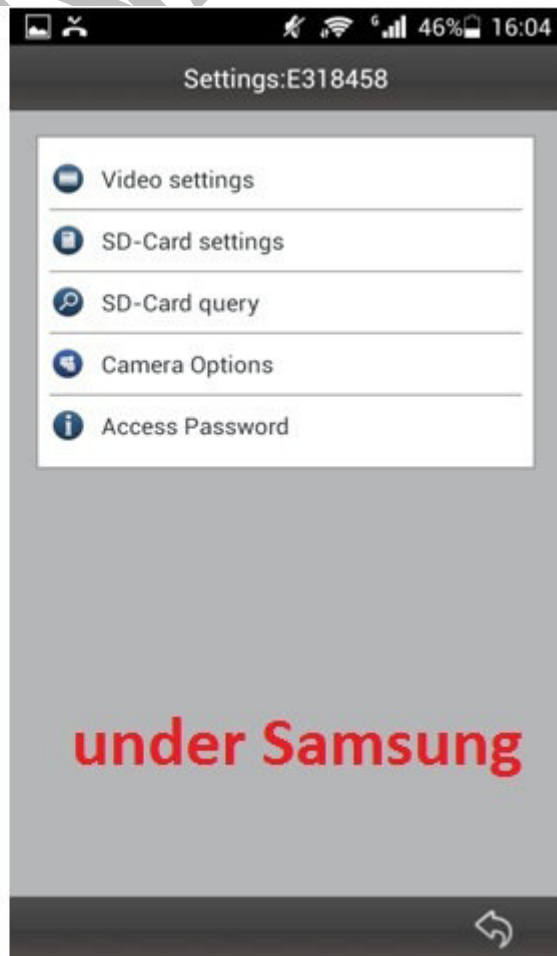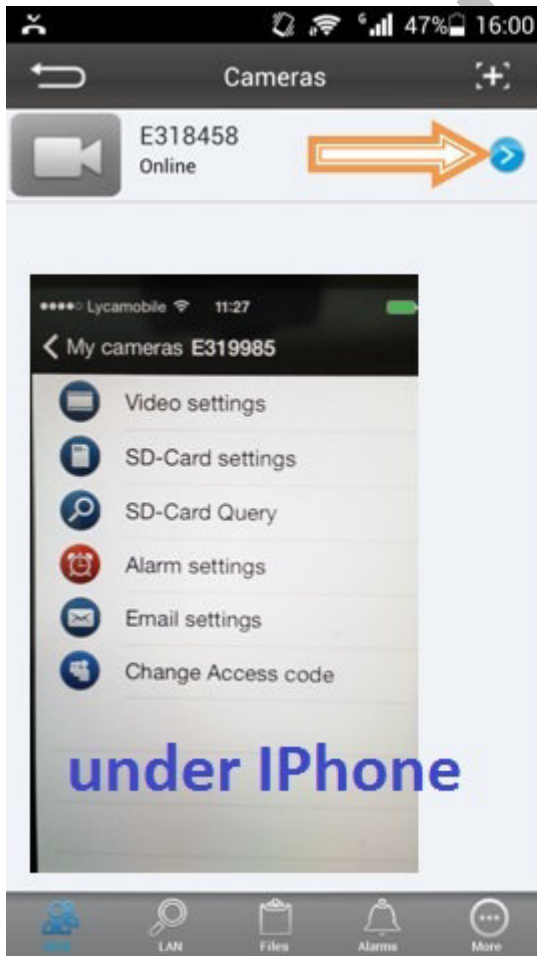


**Attention:** configuration of cameras is only under "Online" status possible!

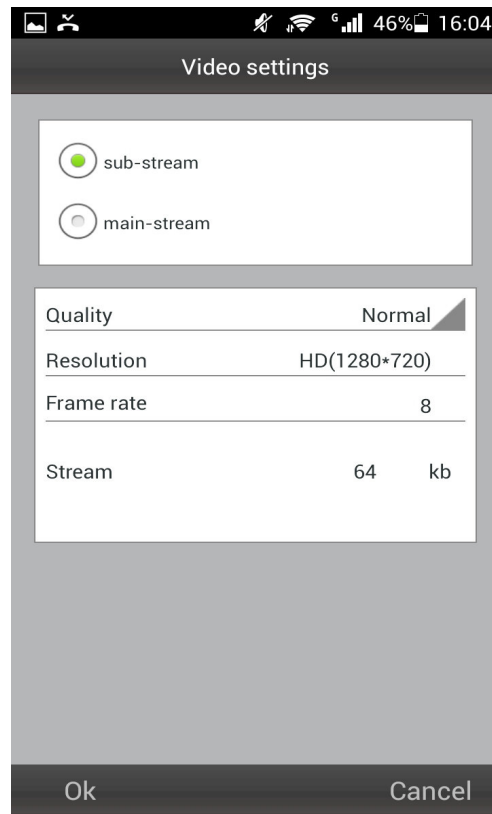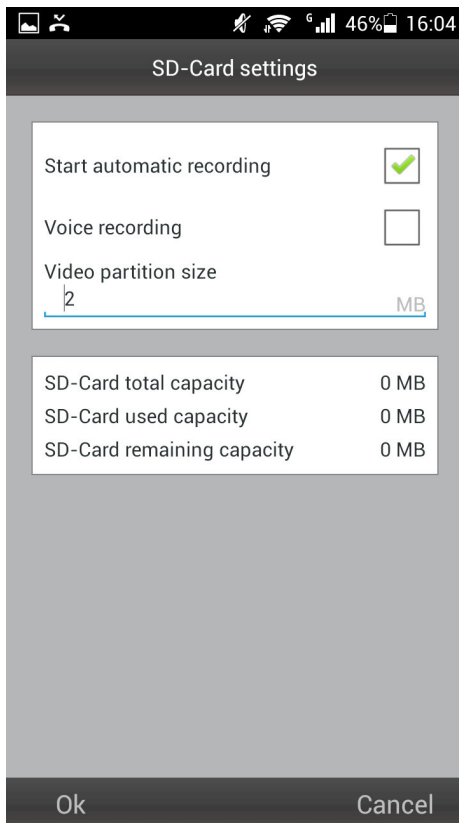






- Automatic recording starts when enough disc space on the MicroSD Card exists (Attention: only for TX-24)
  - Video partition size can be defined how much MB for each stream
- Video settings:
- Select between sub-stream & main-stream
  - Quality: select the quality of the video (low, normal, high, good, super)
  - Set for Resolution, Frame rate & Stream accordingly

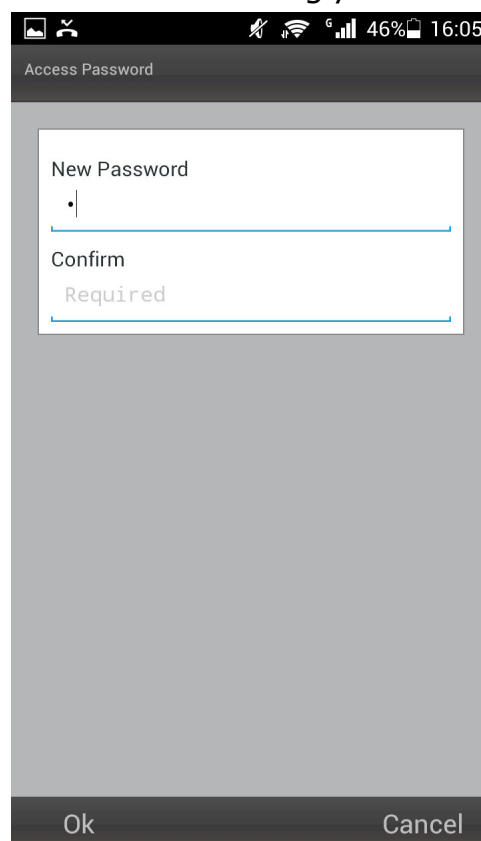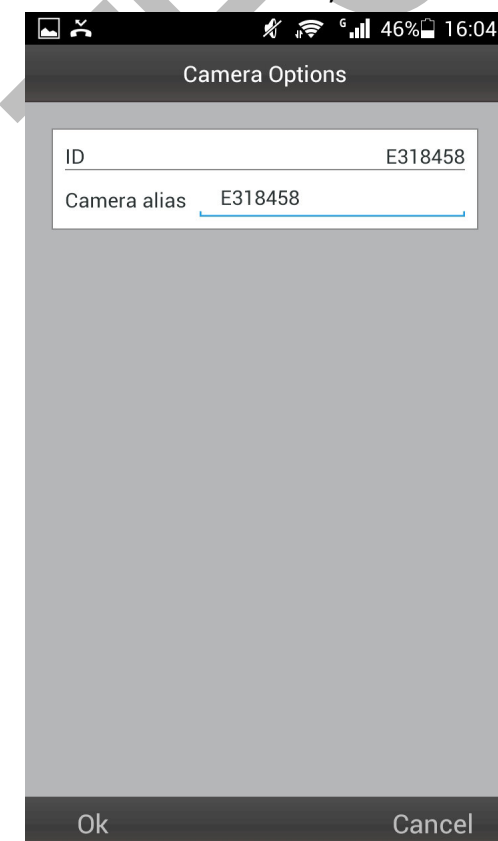

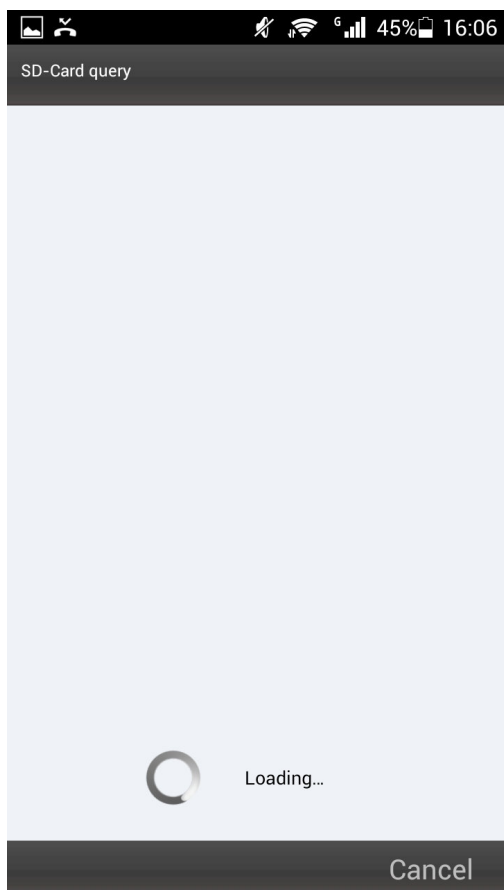



## 10. Setting Camera under sub menu LAN

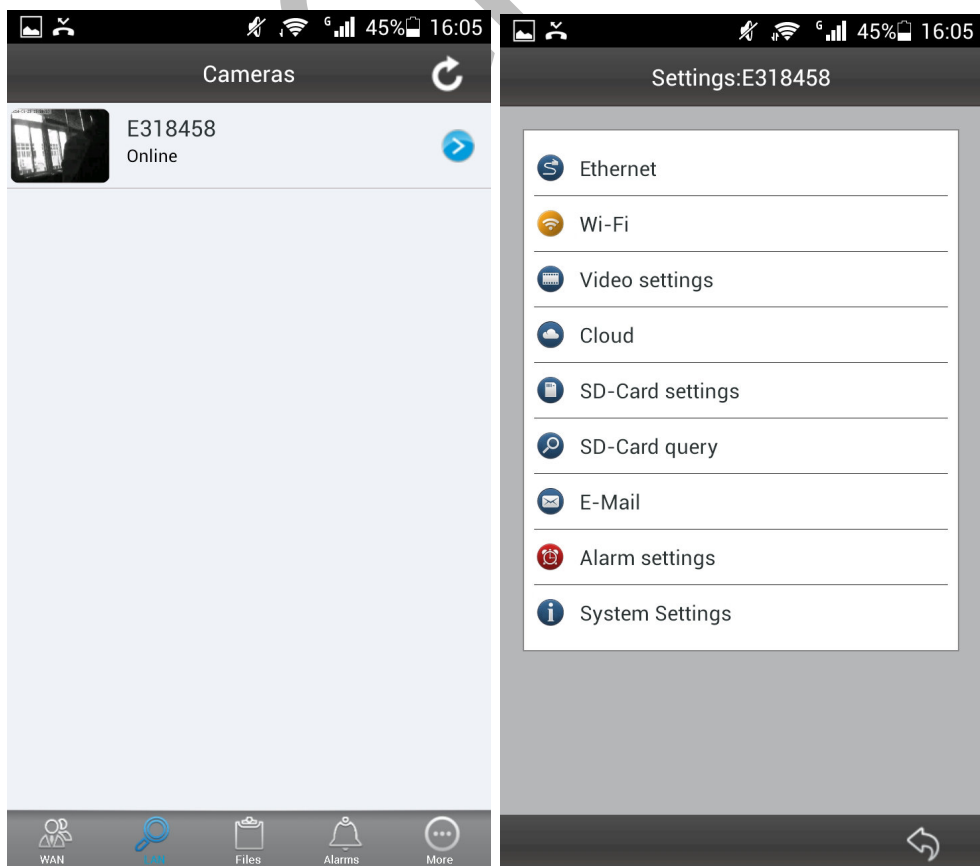

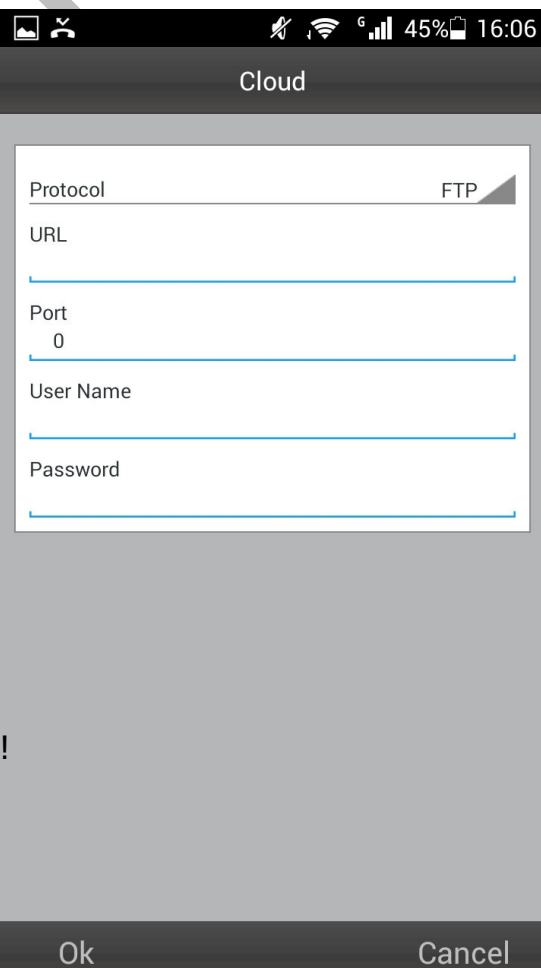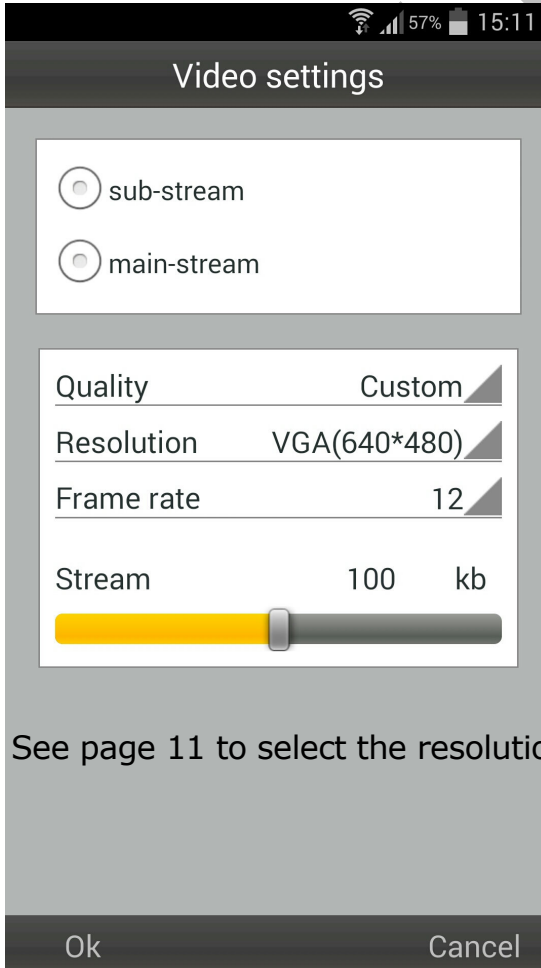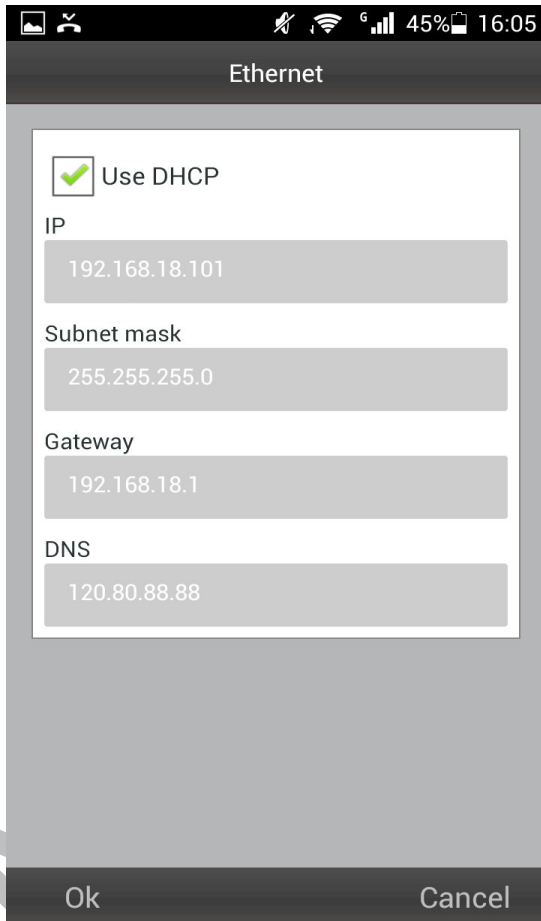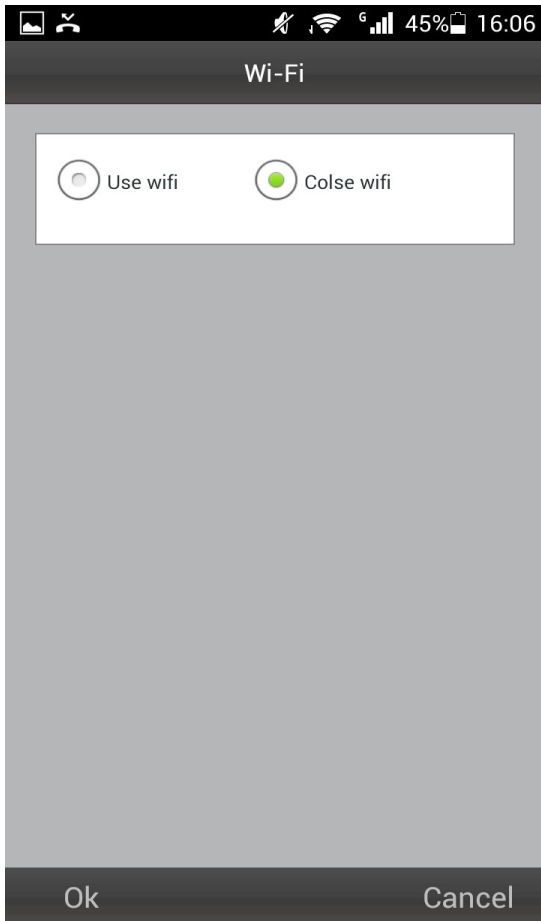


See page 11 to select the resolution!



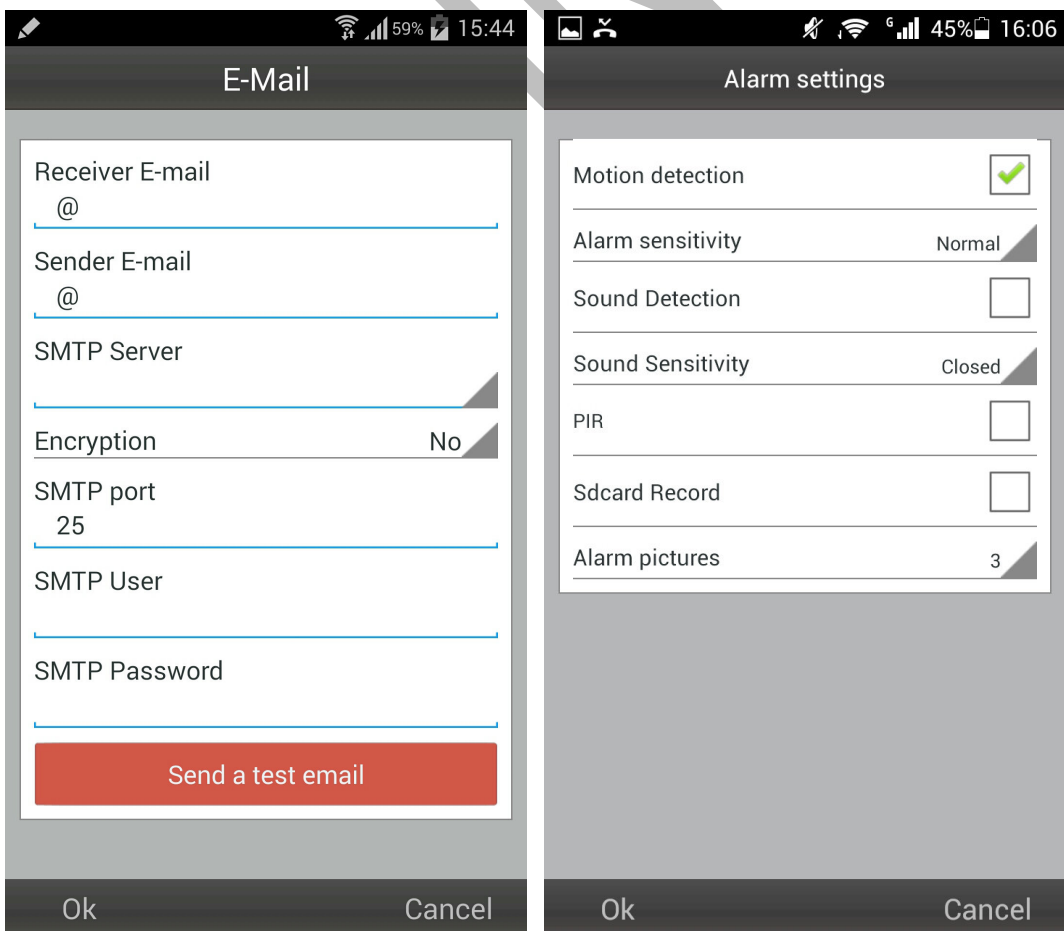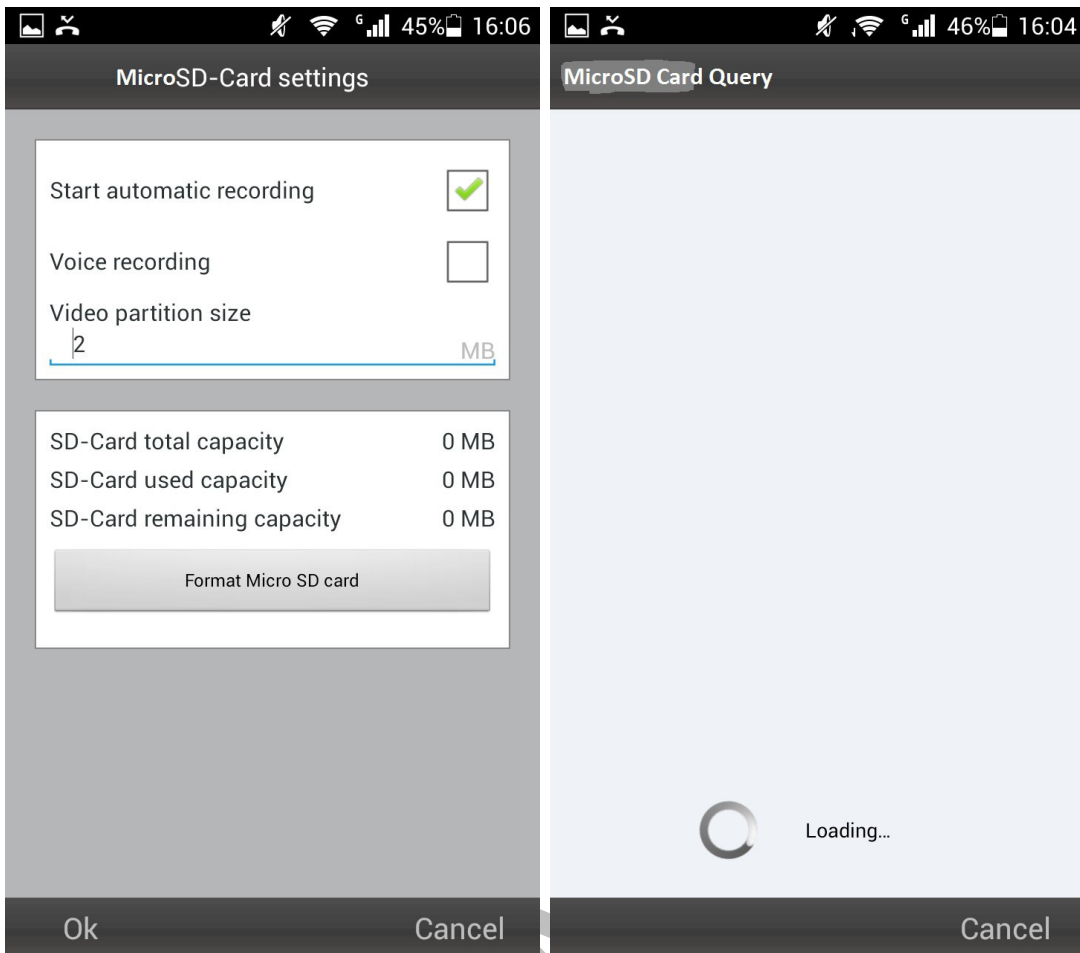


- You can select to enable or disable motion detection & select the sensitivity (highest, high, medium low)

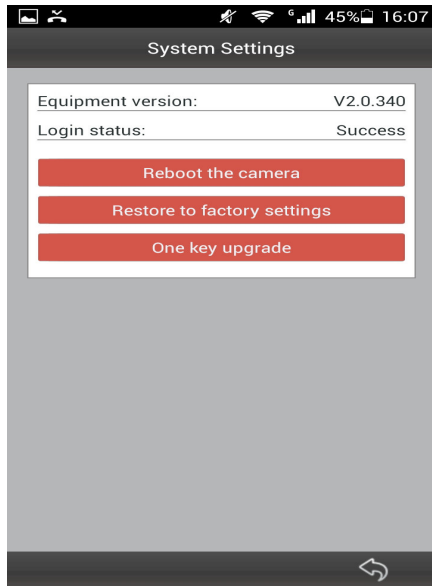


- Control Pan/Tilt, taking photo, recording video


After the connection to the Camera is established you see at the bottom of the Display the following symbol:

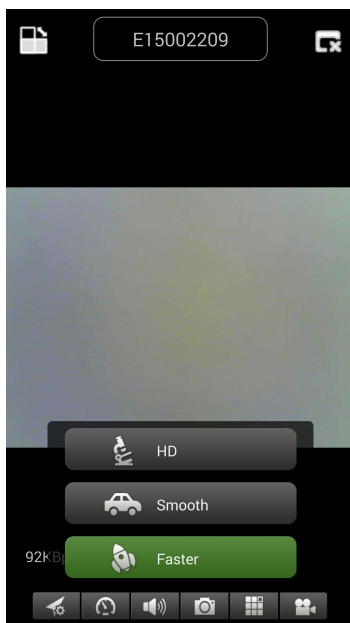

Press the button **(a)** then you find the following picture and select video resolution  
 HD = 1300 kbps  
 Smooth = 800kbps  
 Faster = 400 kbps


When you press button **(b)** you can take a picture directly from the Security Cam.

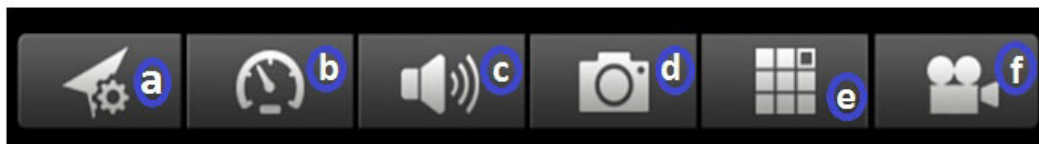

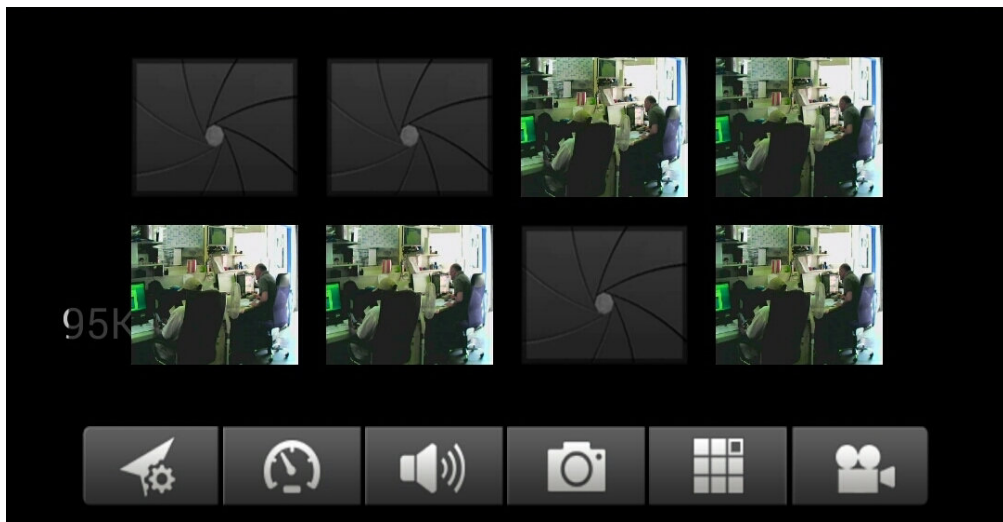


To


remove, replace the picture simply press & hold at each picture and select

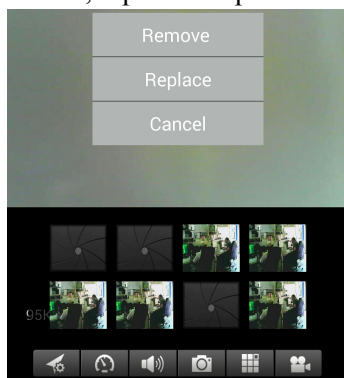



Press button **c** to hear over headphone or to speak through microphone. Connect your headphone to your smart phone or press on the microphone to speak

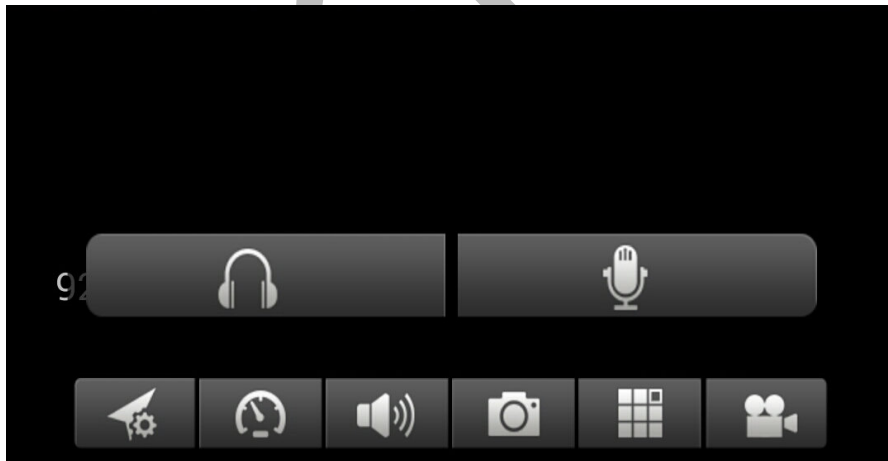


Press **d** to take a picture one by one Press **e** to see a single windows or quad

Press  to start recording a video

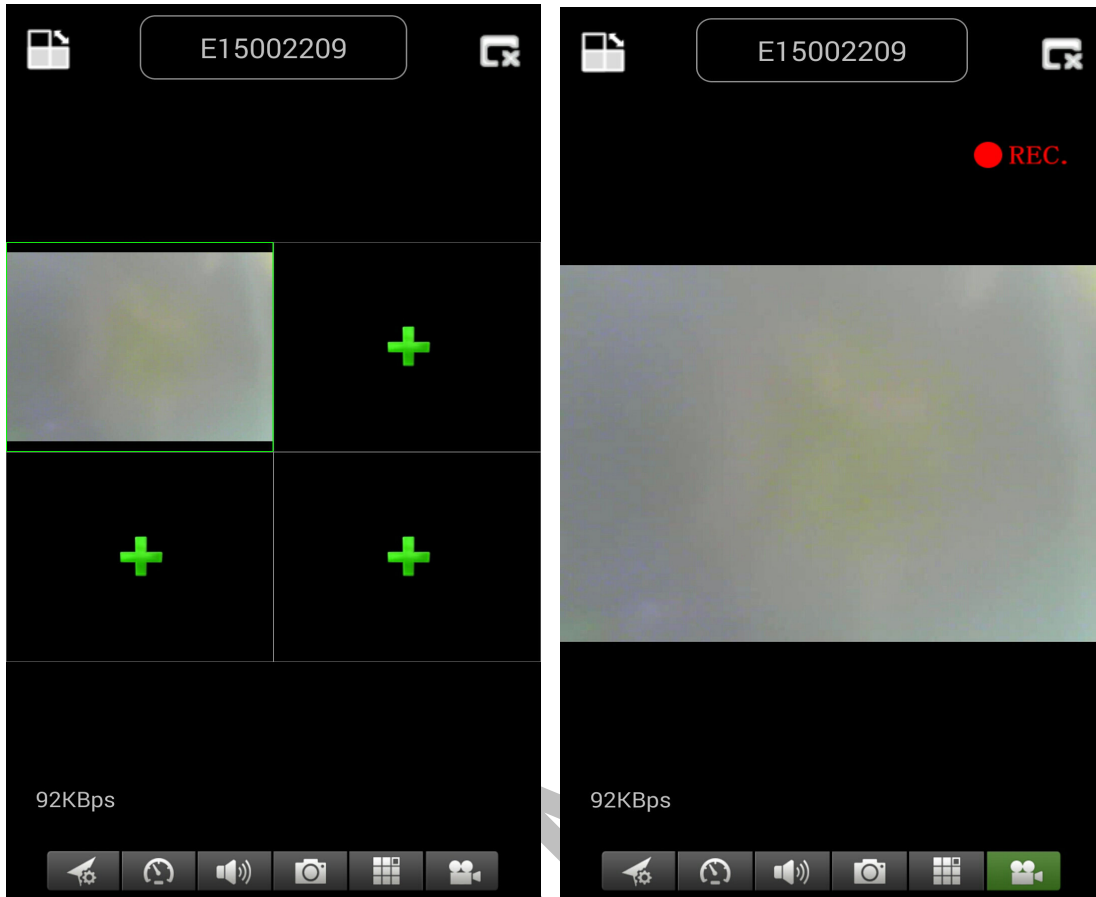


Press  to adjust or change the direction of the Security CAM

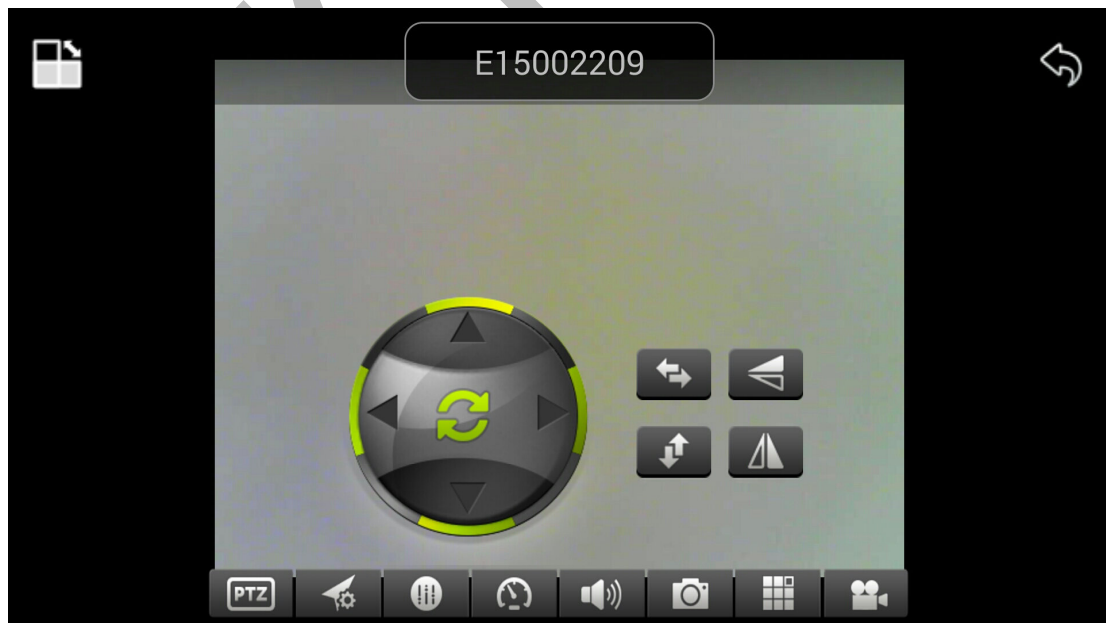


**Attention:** this menu functions only for TX-23!

You can also move the direction of the camera by press & hold the menu for each direction:

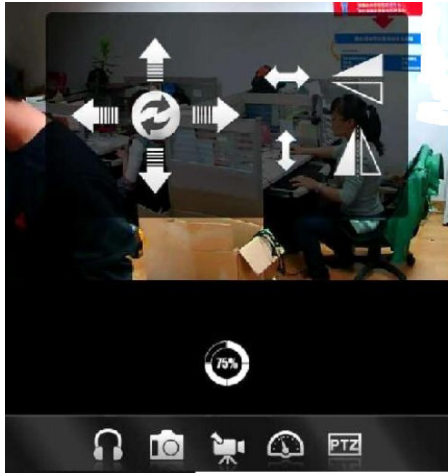


Press **1** to rotate the Security CAM horizontally  
 Press **2** to rotate the Security CAM vertically  
 Press **3** or **4** to invert the Security CAM down or up

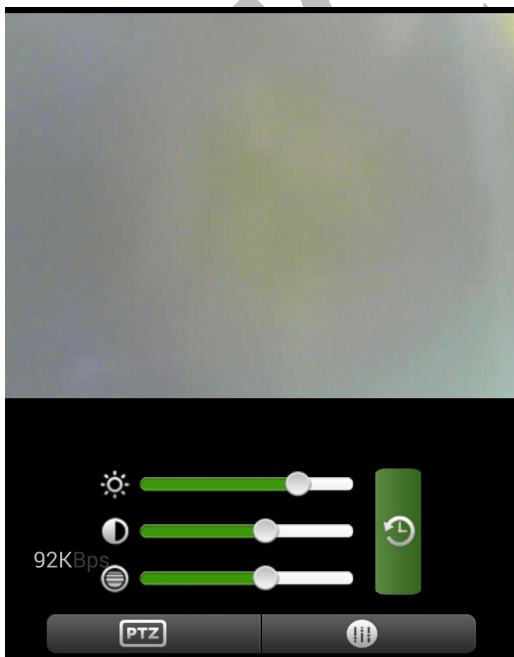

Press the button **h** to adjust the color of the Security CAM

- hold & move a button to the right or left to change brightness
- hold & move to the left or right to change the contrast of the picture
- hold & move to the left or right to change the color of the picture


## 11. Register account (if successfully being registered, jump back to Step 5)

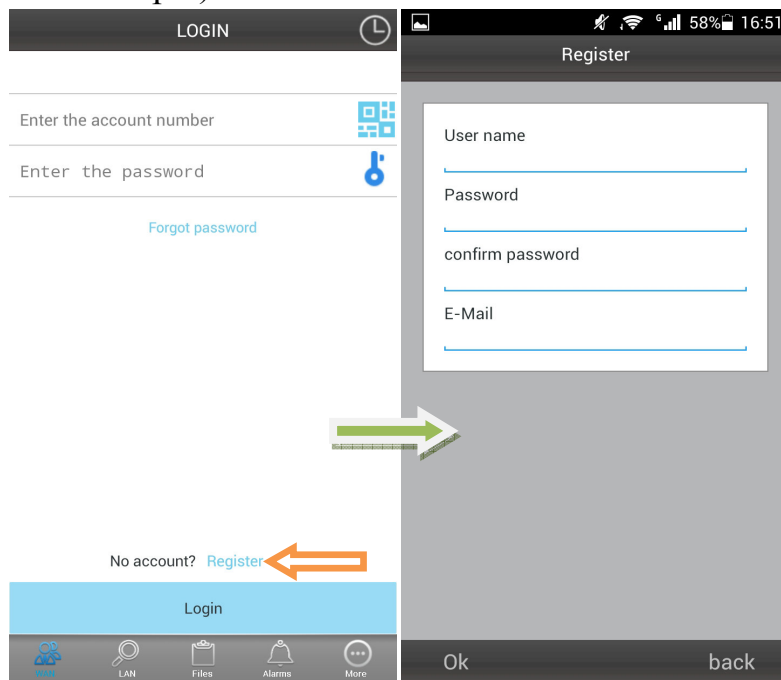


- Press “Register”
- Fill in information
- Click “OK” to complete it

## 12. Add cameras under account (If successfully being added, jump back to step 6)

- Login first - Click “+”
- Click “Add Device” or **(QR Code)** - Scan to add a device automatically
- Camera Alias = here you can give a name which you like
- Camera ID = find this ID under your Camera written with QR Code
- Access code = find this code under your Camera

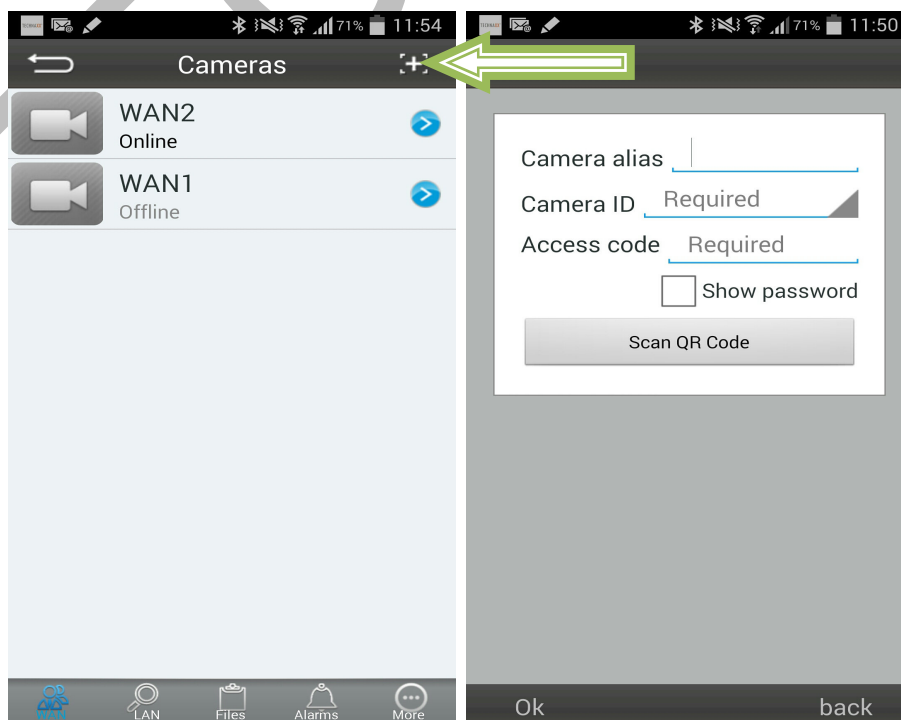

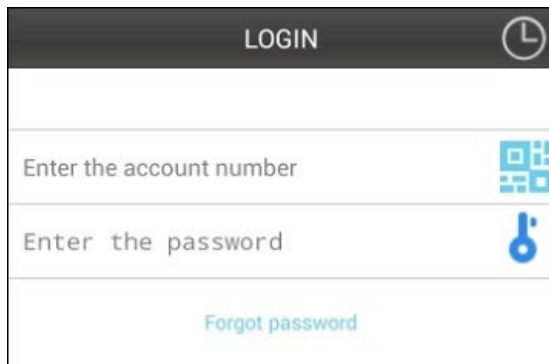


Focus the smart phone camera directly at the QR Code of the security cam.



### - Fill in camera information

- “Device Alias” – give a name to this camera
- “Device ID” – At bottom of each camera, there is a label with QR Code
- “Access Pass.”

-Click “Done” to add it

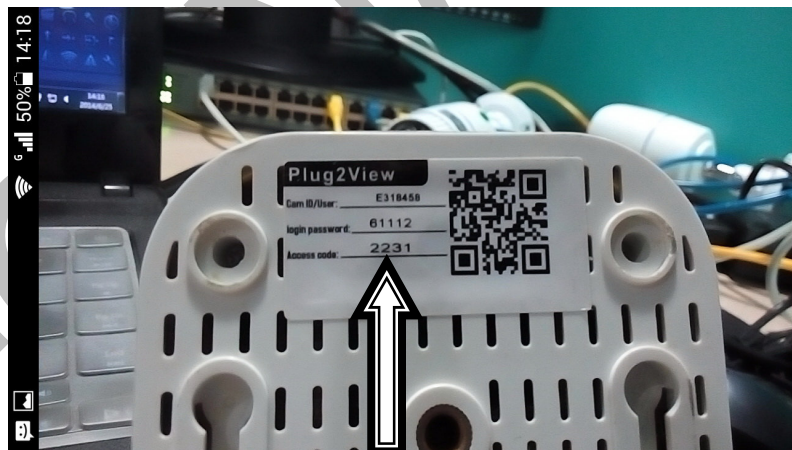

**If successfully being added, the new camera will be in the list**