

Air compressor with working light TX-129

The Declaration of Conformity for this device is under the Internet link: **www.technaxx.de/** (in bottom bar “Konformitätserklärung”). Before using the device the first time, please read the user manual carefully.

Service phone No. for technical support: **01805 012643** (14 cent/minute from German fixed-line and 42 cent/minute from mobile networks).

Free Email: **support@technaxx.de**

Protect yourself and others by observing all safety information. Failure to comply with instruction could result in personal injury and/or property damage!

Keep this user manual for future reference or product sharing carefully. Do the same with the original accessories for this product. In case of warranty, please contact the dealer or the store where you bought this product.

Warranty 2 years


Enjoy your product. Share your experience and opinion on one of the well-known internet portals.

Features

- Main function: portable air compressor to inflate tires of bicycles/cars, soccer/beach balls, etc. usable for emergency roadside tire inflation
- Integrated 5W LED as working light
- Power supply via 12V connection with cigarette lighter socket
- Compressor in a sturdy housing, ideal for air pressure regulation
- Compact design with power cord, air hose and adapter storage compartment
- Manometer (pressure gauge) shows the pressure in Bar and PSI
- 3 extra adapters for bicycle valve, safety valve and ball valve
- Maximum pressure 7 bar / 100 PSI

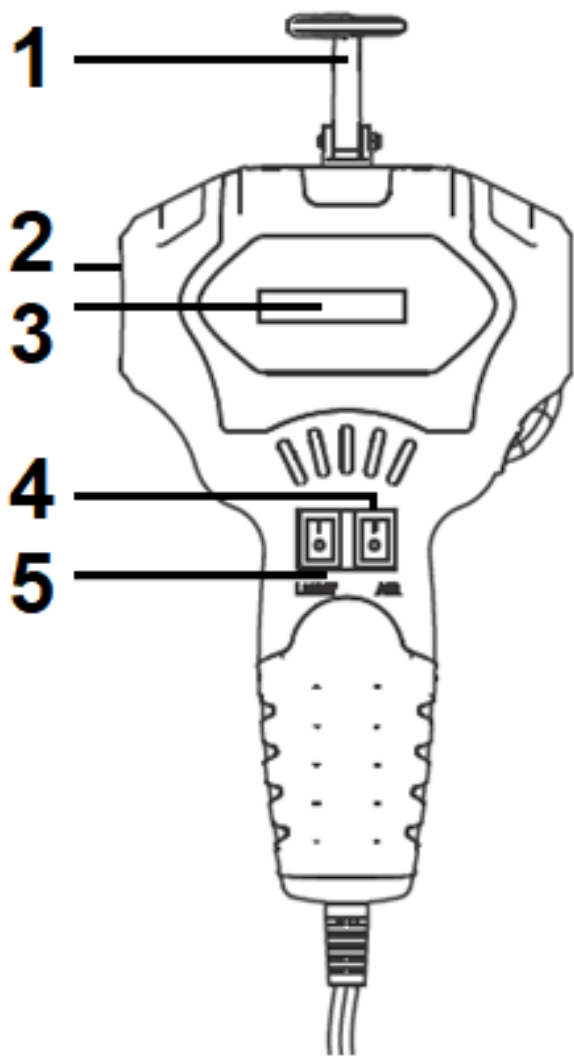
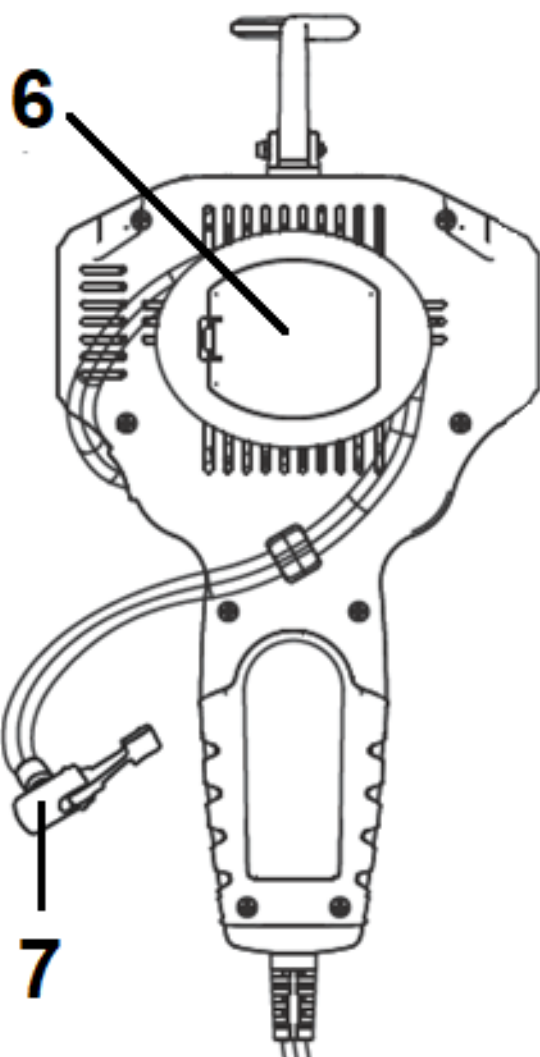
Technical Specification

Power supply	DC 12V cigarette lighter socket
Compressor power	140W
Current	max. 12A
Fuse	15A (F15AL 250V)
Power cord	(L) 3m
Pressure	Max. 7 bar / 100PSI
Manometer	Analog (PSI, Bar)
Air hose	33cm
LED brightness	COB LED 5W / 370 lumen
Protection class	IP30 (protection against impurity/objects from Ø 2.5mm & access with a tool, not waterproof)
Material	ABS
Weight / Dimensions	1.21kg / (L) 35.5 x (W) 16.5 x (H) 12.1 cm
Package contents	Air compressor with working light TX-129, Bicycle valve, Safety valve, Ball valve, User Manual



Hints for Environment Protection: Packages materials are raw materials and can be recycled. Do not disposal old devices or batteries into the domestic waste. **Cleaning:** Protect the device from contamination and pollution (use a clean drapery). Avoid using rough, coarse-grained materials or solvents/aggressive cleaner. Wipe the cleaned device accurately. **Distributor:** Technaxx Deutschland GmbH & Co.KG, Kruppstr. 105, 60388 Frankfurt a.M., Germany

Product & Operation

Front		Rear	
			
1	360° rotatable hook	6	Adapter storage compartment / Bicycle valve / Safety valve / Ball valve
2	Manometer		
3	5W LED working light		
4	On/Off air compressor switch		
5	On/Off work light switch	7	Air hose connector

Working light

→ Plug 12V DC power cord into 12V cigarette lighter socket.

→→ Turn on the working light switch. The 5W LED provides an output of up to 370 lumen.

Air compressor

→ Plug 12V DC power cord into 12V cigarette lighter socket. Take the air compressor to the object you need to inflate.

→→ Remove valve cap and connect the air hose connector to the valve of the object to be inflated.

→→→ Turn on air compressor switch.

→→→→ Stop inflation when the desired pressure has been reached.

Note

- Recommended tire inflation pressure for the vehicle can typically be found on a sticker in the driver's door frame.
- Under normal use the car battery should be able to inflate 4 tires up to 2.4bar/35PSI easily when the engine is off. If the battery is not reliable or in use for 2 or more years, we suggest to start engine to keep battery in good power condition.

Caution

- Do not over inflate tires as tires may rupture and/or explode causing serious injury and/or property damage.
- Maximum continuous work time is 10 minutes. Then stop working for 10 minutes before next inflation.

Attention

- Tire inflation should only be done in a safe area, well off roadway and away from traffic.
- Use reflective warning triangles and/or safety flares to alert other drivers of roadside emergency.

Info

Inflation speed: less than 5 minutes (measured Ø time to inflate a 195 tire from 0 bar/PSI to 2.4 bar/35PSI)

Inflation accessory: ● The inflation needles are located in the adapter storage compartment (6) on the backside of the device. ● To use the inflation accessory open the air hose connector (7) and plug in the adapter, then close the air hose connector. ● The adapter should be tight and secure. Plug the inflation accessory into the object to be inflated (tire, football raft, etc.) and turn on air compressor switch. ● When the object is firm, switch the air compressor off.

ATTENTION: Do not “over inflate” objects as objects may rupture and/or explode causing serious injury and/or property damage.

Hook: Pull the hook (1) out and rotate to hang the work light at desired location. Before storing, return the hook to original position.

Danger: Always operate this air compressor in an open/ well ventilated area, not inside a closed area such as a closed garage.

Warnings

- Do not overload the device (max. current 12A)
- Do not use the device in hazardous locations or areas ● Do not immerse cord, plug or product in water or other liquid. Do not use the device in areas of accumulated water and never in rain (protection class IP30 → not waterproof).
- Keep the device ALWAYS away from flammable areas and/or liquids. ● Do not operate appliance with a damaged cord or plug or after the appliance malfunctions or has been damaged in any way.
- The device can get hot. If the device gets too hot during use, lay it down for a while and let it cool down. Only put the device back in the car when it has cooled down completely.
- If the plastic glass which protects the working light is damaged, do not longer use it. ● Do not direct the light into people eyes.

- To prolong the life of this device, pull it out of the cigarette lighter socket when starting the engine of the car.
- Do not remove any cover to avoid the risk of an electric shock or other damages.
- NEVER disassemble the device, it may result in short-circuit or even damage.
- Never use the inflator as a toy.
- Keep the device away from children.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

US Warranty

Thank you for your interest in the products and services of Technaxx Deutschland GmbH & Co.KG. This Limited Warranty applies to physical goods, and only for physical goods, purchased from Technaxx Deutschland GmbH & Co.KG.

This Limited Warranty covers any defects in material or workmanship under normal use during the Warranty Period. During the Warranty Period, Technaxx Deutschland GmbH & Co.KG will repair or replace, products or parts of a product that proves defective because of improper material or workmanship, under normal use and maintenance.

The Warranty Period for Physical Goods purchased from Technaxx Deutschland GmbH & Co.KG is 1 year from the date of purchase. A replacement Physical Good or part assumes the remaining warranty of the original Physical Good or 1 year from the date of replacement or repair, whichever is longer.

This Limited Warranty does not cover any problem that is caused by conditions, malfunctions or damage not resulting from defects in material or workmanship.

To obtain warranty service, you must first contact us to determine the problem and the most appropriate solution for you.

Technaxx Deutschland GmbH & Co.KG
Kruppstrasse 105, 60388 Frankfurt am Main, Germany
www.technaxx.de * support@technaxx.de