

Technaxx® * User manual

Bluetooth TV headphones with base station TX-350

Please read the instructions for use and the safety information carefully before using the device for the first time.

This device is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they are supervised by a person responsible for their safety or have received instructions on how to use the device. Do not allow children to play with this device unsupervised.

Please keep this manual with the device for future reference or if you pass it on. This also applies to the original accessories for this device. In the event of a warranty claim, contact the retailer or store where you purchased the device.

Enjoy your product! * Share your experiences and opinions on one of the popular online platforms.

Technical changes are subject to change without prior notice. Please refer to the current instructions available on the manufacturer's website.


Features

- Bluetooth V5.4
- Integrated microphone for calls
- Built-in rechargeable battery
- Base station with charging function
- Multiple connection options
- Adjustable headband
- Padded ear and headrest

Technical specifications

Bluetooth version	V5.4
Wireless connection / BT	Range ~10 m (open terrain) Frequency range: 2.4 GHz Maximum transmission power: 100 mW Maximum Bluetooth transmission power: 2.5 mW
Functions	TV mode, BT mode, calls
Speaker output power / driver size / resistance / frequency	30 mW / Ø40 mm / 32Ω / 20 Hz – 20 KHz
Base station connections	3.5 mm AUX port / optical port / USB-C
Playback time	Up to 30 hours (at low volume)
Loading time	about 3 hours
Power supply	5 V / 1 A
Battery	Rechargeable lithium battery 600 mAh , 3.7 V
Charging port	USB-C
Operating temperature	0°C to +40°C
Material	ABS plastic, metal
Weight / Dimensions	600 g / 17 x 21.6 x 9.2 cm
Package contents	Technaxx ® TX-350 with base station, power adapter, charging cable, AUX cable, optical audio cable, user manual

Product overview

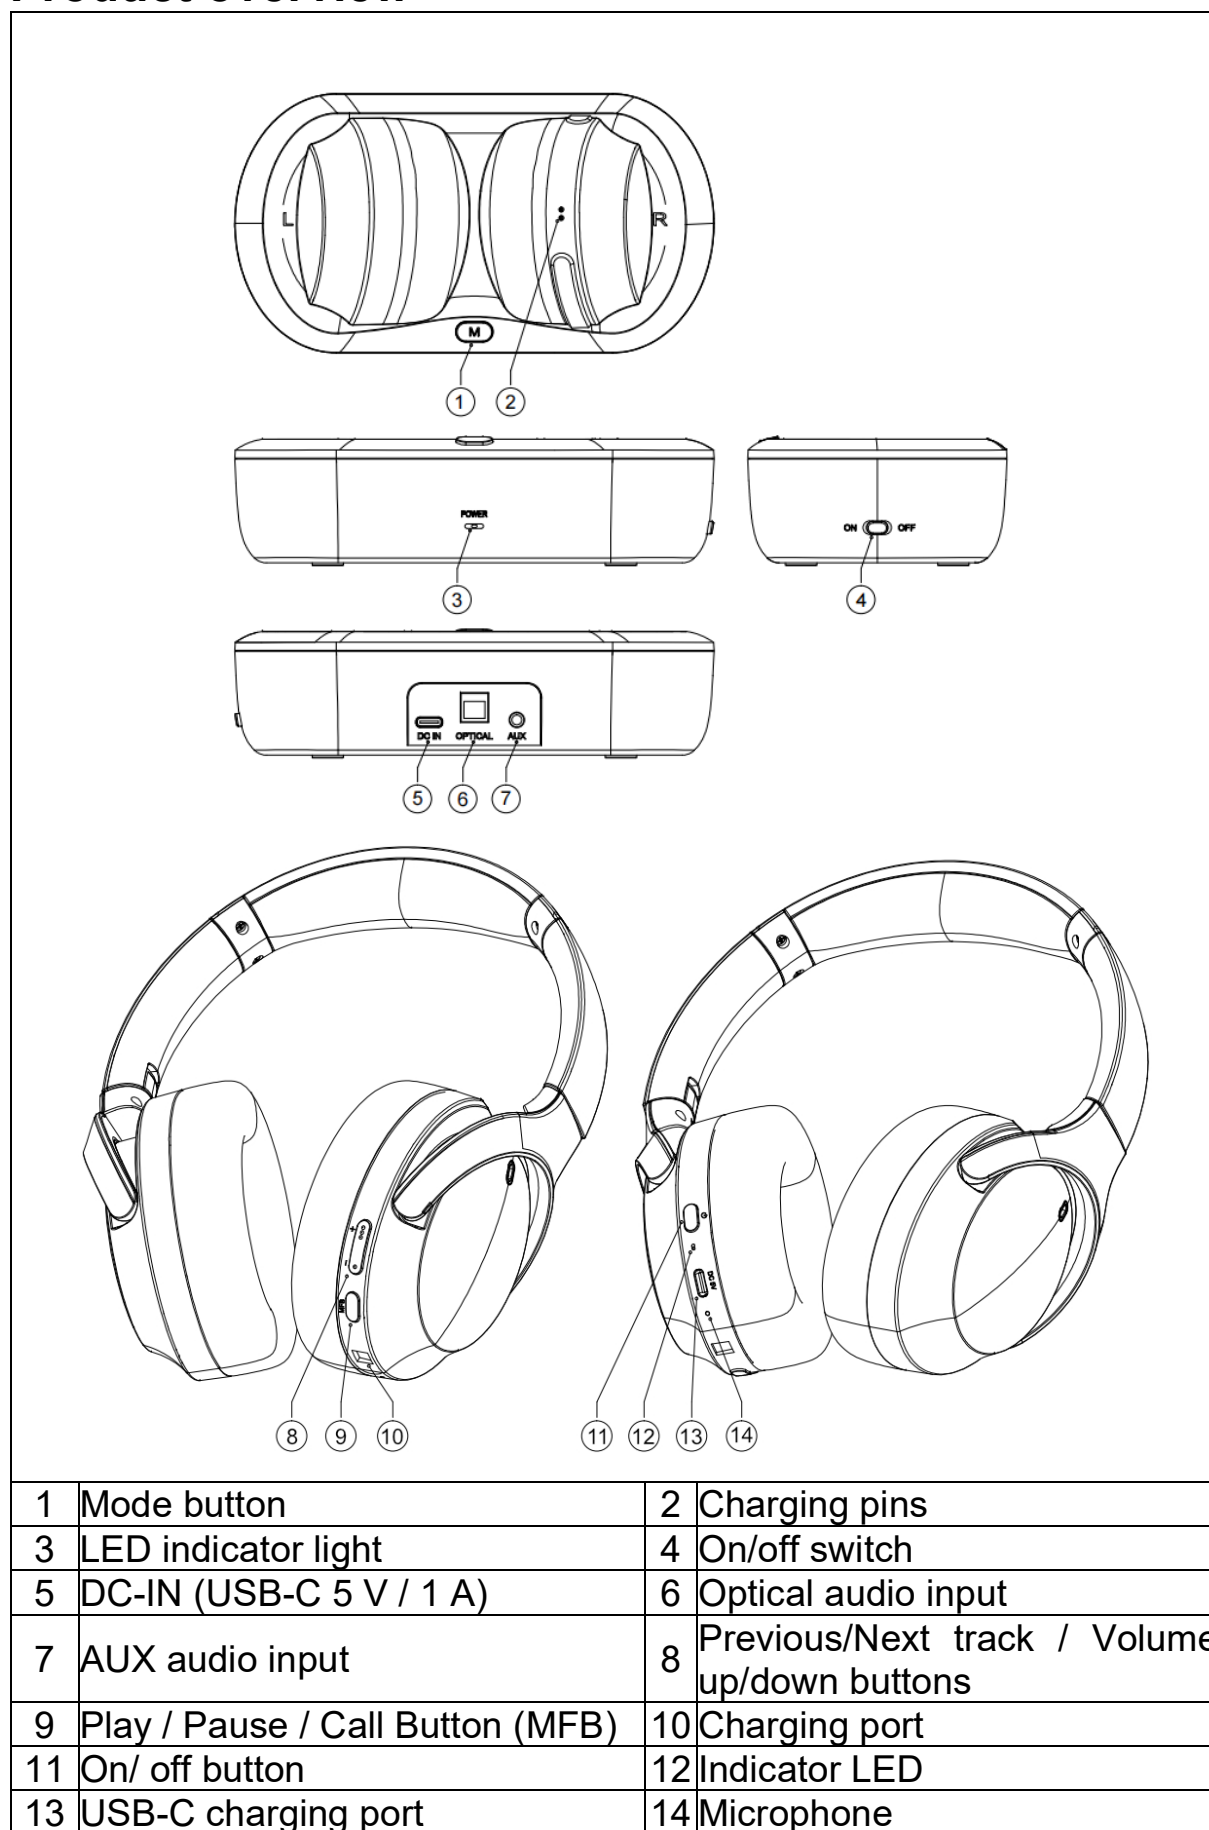

Setup

Connect the base station to your TV using one of the available ports. You can only use one of the following ports at a time:

- Optical input (6): Connect this to the OPT-OUT socket on the TV.
- AUX input 3.5 mm (7): Connect this connector to the headphone output of the TV.

Note: You may need to configure your TV for use - refer to your TV's user manual for details.

Charging process

Place the TX-350 on the base station and connect the charging cable to the base station's USB-C port (5). Connect the other end to the power adapter or any USB port (5 V / 1 A). Slide the power switch (4) to "ON" to turn on the base station. The LED indicator (3) will light up red. The battery will be fully charged after approximately 3 hours. The LED will light up blue when the headphones are fully charged.

The headphones can be charged separately from the base station. To do so, plug the USB-C charging cable into the charging port (13) on the headphones.

Turning on the headphone

Press and hold the power button (11) for 2 seconds to turn on the headphones.

To turn off the headphones, press and hold the button (11) for 5 seconds.

Key functions

- Volume +/- (8): Short press to adjust the volume.
- Previous / Next track (8): Long press to change the track in Bluetooth mode.
- MFB (9): Short press to pause or play playback in BT mode. Answer or hang up a call in BT mode. Double press to redial the last number. Hold for 10 seconds to reset the headphones. (Deletes the pairing of the current Bluetooth device)
- Power button (11): Press and hold this button to turn the device on or off.

Modes

TV mode

Connect the base station according to the instructions in the "Setup" section and turn on the base station and headphones to enjoy the TV sound.

Bluetooth mode

Remove the headphone from the base station and turn them on. The base station must remain turned off. The indicator LED (12) on the headphones will now flash red and blue. Activate Bluetooth search on your device and connect to the "**Technaxx TX-350**".

Technical support

Telephone: **01805 012643*** (14 cents/minute from the German landline network and 42 cents/minute from the mobile network).

Email: **support@technaxx.de**

Service hours : Mon-Fri, 9:00–13:00 and 14:00–17:00.

In case of accidents involving this product, please write to: **gpsr@technaxx.de**

Care of the device

Clean the device only with a dry or slightly damp, lint-free cloth. Do not use abrasive cleaning agents.

Notes

- Noise may be caused by a weak Bluetooth signal. Stay within range (~10 m) to avoid this.
- Avoid prolonged listening at high volume, as this may cause hearing damage.
- Reduce the volume before starting playback and then adjust it to a comfortable level.

Troubleshooting

- No sound: Check the connections; the TV's sound may not be set to the selected connection. Increase the volume; there's no sound at the lowest volume.
- The base station is not connecting to the headphones: Turn on the base station and check the power supply. Disable the Bluetooth connection with a connected device. Reset the headphones' connection by pressing and holding the MFB button (9) for 10 seconds. Press and hold the M button (1) on the base station for 5 seconds to reconnect.
- Bluetooth won't connect: Check the device you're trying to connect; enable Bluetooth visibility on your device. Turn off the base station to activate the headphones' Bluetooth function.
- The headphones are not charging: Check the power supply to the base station. Turn it on to charge the headphones with the base station. Alternatively, the headphones can be charged directly via the USB-C charging port (13).

Safety and warning information

- Do not disassemble the TX-350, as this may cause short circuits or damage.
- Improper handling of the battery may result in fire or chemical burns. If damaged, the battery may explode.
- Use only the recommended charger and do not overcharge the battery. Do not charge the device unattended or overnight.
- Do not undertake any modifications, repairs, or removal of components without professional advice.
- Do not use harsh or volatile liquids for cleaning.
- Do not drop or shake the TX-350, as this may damage the internal components.
- Keep the device in a dry and well-ventilated area and avoid high humidity and extreme temperatures.
- Do not expose the device to water or rain. It is not waterproof.
- Do not wear headphones while driving, cycling, or in other situations where you need to be aware of your surroundings. This can lead to dangerous situations.
- Keep the device out of the reach of small children.

Declaration of conformity



Technaxx Deutschland GmbH & Co. KG hereby declares that the radio equipment type TX-350 Prod. ID.:5335 complies with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

www.technaxx.de/reseller

Disposal



Dispose of packaging. Separate the packaging materials by type: Dispose of cardboard and paper parts as waste paper. Please dispose of plastic materials at the appropriate collection points for recycling.



Disposal of old appliances: (Applies in the European Union and other European countries with special collection systems.) Old appliances must not be disposed of with household waste! Every consumer is legally obliged to dispose of unused appliances separately from household waste, e.g., at collection points in your municipality or district. This ensures environmentally friendly recycling and prevents potential environmental pollution. Electrical appliances are marked with a special symbol to indicate this.



Disposal of batteries and rechargeable batteries: Batteries and rechargeable batteries must not be disposed of with household waste! Consumers are legally obliged to dispose of all batteries and rechargeable batteries (regardless of whether they contain hazardous substances) at collection points in their community or city or in stores. This ensures environmentally friendly recycling. Hazardous substances* are marked as follows: Cd = Cadmium, Hg = Mercury, Pb = Lead. Before disposing of the device, completely discharge the battery and leave it installed in the device.

Made in China

Distributed by:

Technaxx Deutschland GmbH & Co. KG
Konrad-Zuse-Ring 16-18, 61137 Schöneck, Germany